

QWIZDOM Q6 REMOTE

Q#: Displays the current question number.


Menu/Power: Press and hold to turn remote on/off. Press to view menu options: *Help, Search, Sess. ID, User ID, Adjust Contrast, and Exit.*

Enter: Press to submit commands from LCD menu choices.

Directional Arrows: Press to navigate between menu options, answer choices, and questions.

Symbols: Press to enter fraction, punctuation, etc.

Delete: Press to delete the last character.

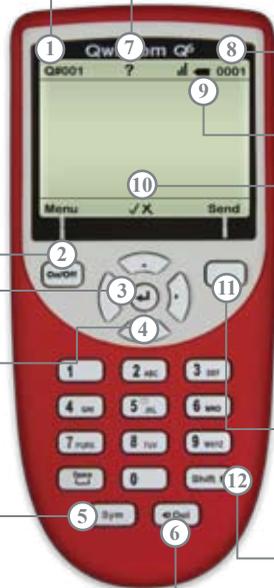

Help Request: Indicates you requested help.

ID#: Displays the remote ID number.

Battery Power: Displays battery charge.

Right/Wrong Feedback: Indicates the submitted response was correct (✓), incorrect (X), or received (✓ X).

Multi-function: Serves as multi-function for Send/Change.

Shift: Changes case options: *ABC/Abc/abc/123/Superscript/Subscript.*

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Common Remote LCD Displays

Searching for Session ID: Remote is searching for the host.

Ready: Remote has found the host and is ready for a question slide.

Power Save Mode: Remote is idle. Click "Resume," to reactivate.

Help: First available Menu option. With "Help" selected, press the menu select key (↵) to ask for help privately or scroll to "Exit" and press (↵).

Session ID Not Found: Remote cannot find the host. Reenter the "Session ID." Press "Menu," scroll to "Enter Session ID," press (↵), enter the Session ID, and press "Search Again."

Session ID Login Denied: User denied due to incorrect User ID, or a duplicate ID. Reenter User ID. Press "Menu," scroll to "Enter User ID," click (↵), reenter the User ID, and press "Join."

Enter User ID: Requesting a User ID number. "Require login by ID" option must be selected in Presentation Setup window to use this optional login method.

Loading: Loading an Answer Key; may take a few moments.

Enter Activity ID: Requesting an Answer Key activity number. Prompt only appears when multiple test versions are being presented. Activity numbers should be noted on the test sheets before presenting; numbers cannot be viewed while in presentation mode.